

# Visualization of Spatial Knowledge with Ontology Trees and Adaptable Search Result Grids in the Era of Web 3.0

Citation for published version (APA):

Loskyll, M., Heckmann, D., & Glahn, C. (2009). Visualization of Spatial Knowledge with Ontology Trees and Adaptable Search Result Grids in the Era of Web 3.0. In K. Tochtermann, & H. Maurer (Eds.), *Proceedings of I-KNOW '09: 9th international conference on knowledge management and knowledge technologies: Proceedings of I-SEMANTICS '09: 5th international conference on semantic systems* (pp. 385-390). Verlag der Technischen Universität Graz. <https://www.econbiz.de/Record/proceedings-know-international-conference-knowledge-management-knowledge-technologies-proceedings-semantics-international-conference-semantic-systems/10008738098>

## Document status and date:

Published: 01/01/2009

## Document Version:

Peer reviewed version

## Document license:

CC BY-NC-ND

## Please check the document version of this publication:

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

## General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

<https://www.ou.nl/taverne-agreement>

## Take down policy

If you believe that this document breaches copyright please contact us at:

[pure-support@ou.nl](mailto:pure-support@ou.nl)

providing details and we will investigate your claim.

Downloaded from <https://research.ou.nl/> on date: 05 May. 2023

Open Universiteit  
[www.ou.nl](http://www.ou.nl)



# Visualization of Spatial Knowledge with Ontology Trees and Adaptable Search Result Grids in the Era of Web 3.0

**Matthias Loskyll, Dominikus Heckmann**

(Saarland University/DFKI GmbH, 66123 Saarbrücken, Germany  
matthias@xantippe.cs.uni-sb.de)

**Christian Glahn**

(Open University, Netherlands  
christian.glahn@ou.nl)

**Abstract:** With the emerging trend of Web 3.0 and the resulting huge amount of user-generated semantically-enriched data, improved ways of knowledge visualization and human computer interaction are needed. We present several techniques of visualizing particularly spatial knowledge in largely scalable, clear structured ontology trees on the web. In addition, we describe the representation of search results with a combined approach consisting of Ajax-based grids and Google Maps.

**Key Words:** spatial knowledge visualization, search results visualization, ontology

**Category:** H.5.2

## 1 Introduction

The visualization of spatial knowledge in the era of Web 3.0 raises interesting new research questions. How can one represent huge collections of knowledge (e.g. ontologies with over 10 million concepts) as browsable trees in a scalable manner and with a clear user interface? Which is an easy-to-use and efficient representation of search results, especially over spatial data? These are the central questions we want to address with our visualization approaches.

The visualization techniques we present in this paper are part of the **UbisWorld** project, which focuses its research on ubiquitous user modeling [Heckmann 2006] and Web 3.0, i.e. the integration of the ideas of the Web 2.0 with the technologies of the Semantic Web [Wahlster and Dengel 2006]. The knowledge base of the system is built out of two ontologies: GUMO (General User Modeling Ontology) [Heckman et al. 2007] and UbisOntology. Several external ontologies (e.g. SUMO [Pease 2002], DOLCE, OpenCyc) and taxonomies (e.g. the Amazon.com category tree) have also been parsed and integrated into the UbisWorld.

The ontologies are represented as foldable trees whose nodes consist of classes and instances whereby the conversion from ontologies (usually represented as graphs) to trees is performed by using multiple heritage. All the trees can be browsed in a very efficient way by using Ajax technologies [Loskyll 2007] [Garrett 2005].

This means that the data needed to display the layer of a tree is sent to the client not before the user has opened the corresponding parent node. Using this visualization technique we are able to display huge ontologies as trees. In addition to classes and instances, we are also able to visualize relations and properties as well as limitation nodes which help to make the trees easier to browse. While other approaches like the GeoTree (<http://geotree.geonames.org/>) only display at most 999 nodes per tree layer, we are basically able to display arbitrary large numbers of nodes on one layer and to keep a clear structured user interface at the same time.

The second methodology described in this paper aims at an easy-to-use representation of search results. Again we use Ajax technologies to create an adaptable search result grid, which provides paging and sorting functionalities. Additionally, the currently shown search results are displayed as markers on Google Maps. Both approaches are highly optimized for collections of spatial knowledge. Therefore, we demonstrate them by means of our UbiSEarth ontology.

## **2 Visualization of Spatial Knowledge and Search Results**

Nowadays, more and more spatial knowledge and location-aware data become publicly available due to user-generated content in the Web 2.0. Consequently, improved techniques for identification, visualization and interaction are needed for user interfaces.

### **2.1 UbiSEarth: Visualization of Named Graphical Entities and their Spatial Relations**

In the UbiSEarth ontology tree (our largest ontology with about 28 million nodes) we display the different instances of the world beginning on top and going down over continents, regions and cities up to even buildings and rooms. In addition, the tree contains many lakes, streams and mountains. In order to add further meaning to the different nodes and to give the tree more structure, we created different role (or relation) nodes as depicted in Figure 1.

The role "Country", for instance, not only tells us that Europe has 52 countries, but also the other way around, i.e. that Austria, for example, is a country located in Europe. This figure shows another strength of our approach: using a newly defined mechanism to define multilingual labels, which we call UbiLabel, we are able to display not only the English translation of a country's or city's name, but also the appropriate translations into all the languages spoken in the corresponding country.


Furthermore, this tree emphasizes the biggest strength of our visualization technique by pre-processing and displaying limitation nodes, which subsume large numbers of nodes depending on the number of nodes on one tree layer in ten

thousand or hundred packets, respectively. These nodes add additional structure to the tree hierarchy and facilitate an easy-to-use tree browsing. This is one of the big advantages of our approach compared with related work like the GeoTree mentioned above.




**Figure 1:** Part of the UbiEarth ontology tree

The properties of different locations are also integrated into the tree. For countries we show information like area, capital, currency, spoken languages and population (Figure 2 left), whereas cities can have properties like altitude, latitude, longitude, population, zip codes or dialing codes (Figure 2 right).

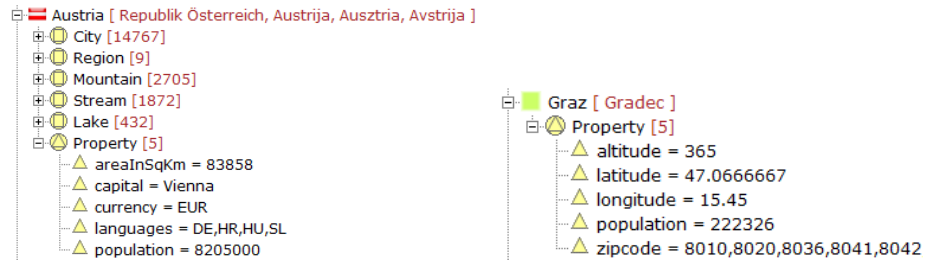

**Figure 2:** Left: Property nodes for Austria; Right: Property nodes for Graz

Based on this visualization technique, we implemented an extension of the ontology tree representation with additional editing functionalities. This online ontology editor (called UbiEditor) [Loskyl and Heckmann 2009] shall make an end-user friendly collective knowledge building possible. The editor already supports the most important functionalities for editing an ontology: creating new classes or instances, renaming and deleting objects. By using a context menu, we provide an efficient and easy-to-use way of performing these editor actions (Figure 3). With the help of UbiEditor our users could add new translations of location names, fix mistakes or add an instance of their residence, for example.

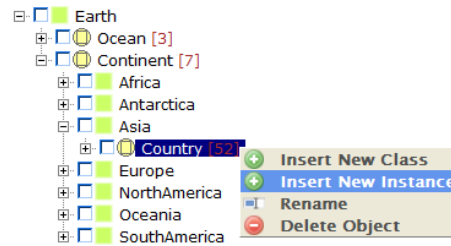

**Figure 3:** UbiEditor after right mouse button click

## 2.2 UbiSearch: Adaptive Search Results of Spatial Data

UbiSearch is our search engine, which can be used to find classes, instances and properties of our ontologies. This is an important feature, especially when a user plans to insert a new element into the UbiWorld ontology, but is not sure whether such a concept already exists. We built our own inverted index, in which we assign each term that occurs in a UbiLabel of our ontologies to the corresponding list of UbiPointers (our unique object identifiers). By doing so, we are able to perform search queries in an efficient way. However, the big difference compared with the Google search engine, for example, is that we search over a set of labels instead of documents.

We display the results by using a JavaScript grid, which supports on-demand-loading by using Ajax technologies and paging, i.e. we can present very large search result sets. The grid can be sorted either by relevance, UbiPointer, UbiLabel or population. By default, the information is sorted firstly by relevance and secondly by population (or UbiLabel in case of non-spatial data). Figure 4 shows the search results for the key word “Graz”. In addition, you can easily make sure that this is the Austrian city by looking at the parent column, which shows the different occurrences of this city in our ontology. One of the parents

tells us that this is a city in Austria. The idea behind the occurrence column is that we can have multiple occurrences of one location (e.g. a city can appear as located in a country, but also in a region). Selecting one of the occurrence links opens the corresponding node in the ontology tree.

**Search Results:**

12 search results found for 'graz': Relevance ▾

Relevance	UbiPointer	UbiLabel	Population	Occurrences	Parents
100%	<a href="#">CITY_2778067</a>	Graz [ Gradec ]	222326	<a href="#">M_G-0-1-3-0-3-0-0-33-72</a> <a href="#">M_G-0-1-3-0-3-1-5-0-7-21</a>	<a href="#">3301-3400OfCityAtAustria</a> <a href="#">701-800OfCityAtSteiermark</a>
70%	<a href="#">CITY_2773020</a>	Langeegg bei Graz		<a href="#">M_G-0-1-3-0-3-0-0-63-75</a> <a href="#">M_G-0-1-3-0-3-1-5-0-14-10</a>	<a href="#">6301-6400OfCityAtAustria</a> <a href="#">1401-1500OfCityAtSteiermark</a>
70%	<a href="#">CITY_2770874</a>	Nestelbach bei Graz		<a href="#">M_G-0-1-3-0-3-0-0-78-4</a> <a href="#">M_G-0-1-3-0-3-1-5-0-17-2</a>	<a href="#">7801-7900OfCityAtAustria</a> <a href="#">1701-1800OfCityAtSteiermark</a>
70%	<a href="#">CITY_2766565</a>	Sankt Marein bei Graz		<a href="#">M_G-0-1-3-0-3-0-1-8-97</a> <a href="#">M_G-0-1-3-0-3-1-5-0-23-85</a>	<a href="#">10801-10900OfCityAtAustria</a> <a href="#">2301-2400OfCityAtSteiermark</a>
70%	<a href="#">CITY_2766420</a>	Sankt Radegund bei Graz		<a href="#">M_G-0-1-3-0-3-0-1-10-17</a> <a href="#">M_G-0-1-3-0-3-1-5-0-24-11</a>	<a href="#">11001-11100OfCityAtAustria</a> <a href="#">2401-2500OfCityAtSteiermark</a>
70%	<a href="#">CITY_2774894</a>	Kalsdorf bei Graz		<a href="#">M_G-0-1-3-0-3-0-0-52-40</a> <a href="#">M_G-0-1-3-0-3-1-5-0-11-32</a>	<a href="#">5201-5300OfCityAtAustria</a> <a href="#">1101-1200OfCityAtSteiermark</a>
70%	<a href="#">CITY_2779671</a>	Feldkirchen bei Graz		<a href="#">M_G-0-1-3-0-3-0-0-23-97</a> <a href="#">M_G-0-1-3-0-3-1-5-0-4-83</a>	<a href="#">2301-2400OfCityAtAustria</a> <a href="#">401-500OfCityAtSteiermark</a>
70%	<a href="#">SUBREGION_AT06601</a>	Graz Stadt		<a href="#">M_G-0-1-3-0-3-1-5-1-0</a>	<a href="#">SubregionAtSteiermark</a>
70%	<a href="#">SUBREGION_AT06606</a>	Politischer Bezirk Graz Umgebung		<a href="#">M_G-0-1-3-0-3-1-5-1-5</a>	<a href="#">SubregionAtSteiermark</a>
70%	<a href="#">STREAM_2778066</a>	Graz Bach		<a href="#">M_G-0-1-3-0-3-3-4-52</a>	<a href="#">401-500OfStreamAtAustria</a>


1 2 — Records from 1 to 10 of 12

**Figure 4:** Adaptable search results for “Graz”

In addition to the grid visualization, we display the ten search results that are currently shown on the selected page of the grid as numbered markers on Google Maps (Figure 5). The numbering of the markers make it easy to identify which search result corresponds to which location on the map. We also provide a functionality to show all search results at once as Google Maps markers.

### 3 Conclusions and Future Work

We have addressed the questions how to represent huge knowledge sets as scalable trees on the web and how the represent particularly spatial search results in an easy-to-use manner. As partial answers, we have presented improved techniques for visualizing huge sets of spatial knowledge with the help of newly defined ontology trees by means of our UbiEarth ontology. Our ontology tree representation approach includes concepts to define relations, properties and structuring nodes in an Ajax-based tree visualization. Furthermore, we described how our adaptable search result grid can be used to efficiently display, browse

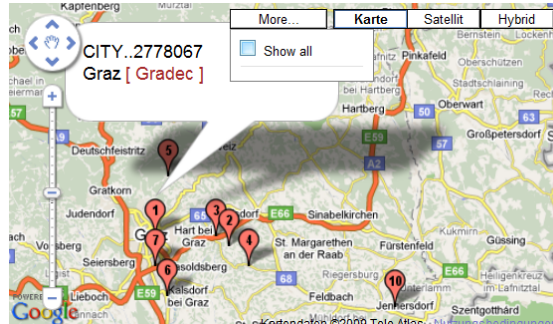

**Figure 5:** Displaying search results with Google Maps

and sort large sets of search results. These technologies can be tested as registered user at [www.ubisworld.org](http://www.ubisworld.org).

In the near future, we are going to perform an extensive evaluation of the ontology tree and search result grid visualization techniques.

## References

- [Garrett 2005] Garrett, J. J.: “Ajax: A New Approach to Web Applications”; (2005).
- [Heckmann 2006] Heckmann, D.: “Ubiquitous User Modeling”; Berlin: Akademische Verlagsgesellschaft Aka GmbH, (2006).
- [Heckman et al. 2007] Heckmann, D., Schwarzkopf, E., Mori, J., Dengler, D., Kröner, A. : “The User Model and Context Ontology GUMO Revisited for Future Web 2.0 Extensions”; In: CEUR Workshop Proceedings (2007).
- [Loskyll 2007] Loskyll, M.: “Ontological and Ajax-based Extension of UbiWorld”; Bachelor thesis, Chair for Artificial Intelligence, Prof. Dr. Dr. h.c. mult. Wahlster, Saarland University, (2007).
- [Loskyll and Heckmann 2009] Loskyll, M., Heckmann, D.: “UbiEditor 3.0: Collaborative Ontology Development on the Web”; In: Proceedings of the Hypertext 2009 workshop on Web 3.0 - Merging Semantic Web and Social Web, Torino, Italy (2009).
- [O’Reilly 2005] O’Reilly, T.: “What is Web 2.0”; (2005).
- [Pease 2002] Pease, A., Niles, I., Li, J.: “The Suggested Upper Merged Ontology: A Large Ontology for the Semantic Web and its Applications”; Workshop on Ontologies and the Semantic Web, (2002).
- [Wahlster and Dengel 2006] Wahlster, W. and Dengel, A.: “Web 3.0: Convergence of Web 2.0 and the Semantic Web”; Telekom Technology Radar II, Juni, (2006).